



ALUMINIUM DISPLAY



Ip65 Front Panel

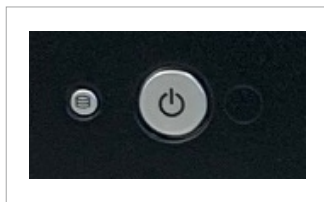

Accessible power button




Wide temperature range



Wide range power input

| MODEL | BASIC-117-SK |
|---------------------------------|--|
| I/O | |
| VGA | 1 |
| HDMI | - |
| DVI | 1 |
| DP | 1 |
| TOUCHSCREEN | USB |
| OTHERS | - |
| POWER | 4-pin DC terminal block; 2-pin remote power switch |
| DISPLAY | |
| DISPLAY TYPE | 17" TFT-LCD 4:3 |
| MAX RESOLUTION | 1280 x 1024 |
| MAX COLOR | 16.7 M |
| BRIGHTNESS (cd/m ²) | 300 |
| VIEW ANGLE (H°/V°) | 80/80° |
| CONTRAST | 800:1 |
| TOUCHSCREEN | |
| TYPE | Resistive Zero Bezel (R) |
| INTERFACE | USB |
| POWER | |
| POWER INPUT | 9 ~ 32V DC |
| POWER CONSUMPTION | - |
| MECHANICAL | |
| CONSTRUCTION | Aluminium front panel |
| IP RATING | IP66 front panel |
| MOUNTING | RACK mounting |
| DIMENSIONS (mm) | 483 x 356 x 63 |
| NET WEIGHT (kg) | 5 kg |
| ENVIRONMENT | |
| OPERATING TEMPERATURE | 0 ~ 50° C |
| STORAGE TEMPERATURE | -20 ~ 70° C |
| STORAGE UMIDITY | 10 ~ 90% @40 non-condensing |
| CERTIFICATION | CE |
| ORDERING | 17" TFT, 1280x1024, RST, 9-32V DC, 300cd/m2 |

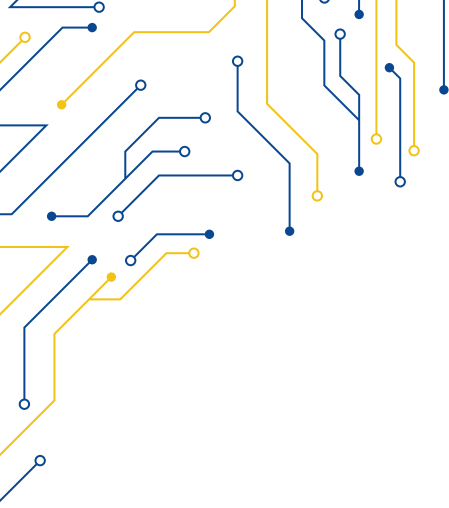

BASIC-117-SK

