



## ALUMINIUM DISPLAY



Ip65 Front Panel

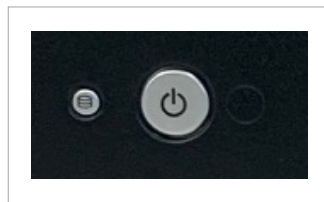

Accessible power button




Wide temperature range



Wide range power input

MODEL	BASIC-118-SK	
<b>I/O</b>		
VGA	1	
HDMI	-	
DVI	1	
DP	1	
TOUCHSCREEN	USB	
OTHERS	-	
POWER	4-pin DC terminal block; 2-pin remote power switch	
<b>DISPLAY</b>		
DISPLAY TYPE	18.5" TFT-LCD 16:9	
MAX RESOLUTION	1366 x 768	1920 x 1080
MAX COLOR	16.7 M	
BRIGHTNESS (cd/m <sup>2</sup> )	300	
VIEW ANGLE (H°/V°)	85/80°	
CONTRAST	1000:1	
<b>TOUCHSCREEN</b>		
TYPE	Resistive Zero Bezel (R)	
INTERFACE	USB	
<b>POWER</b>		
POWER INPUT	9 ~ 32V DC	
POWER CONSUMPTION	-	
<b>MECHANICAL</b>		
CONSTRUCTION	Aluminium front panel	
IP RATING	IP66 front panel	
MOUNTING	RACK mounting	
DIMENSIONS (mm)	480 x 310 x 83.5	
NET WEIGHT (kg)	5 kg	
<b>ENVIRONMENT</b>		
OPERATING TEMPERATURE	0 ~ 50° C	
STORAGE TEMPERATURE	-20 ~ 70° C	
STORAGE UMIDITY	10 ~ 90% @40 non-condensing	
CERTIFICATION	CE	
<b>ORDERING</b>	17" TFT, 1280x1024, RST, 9-32V DC, 300cd/m2	

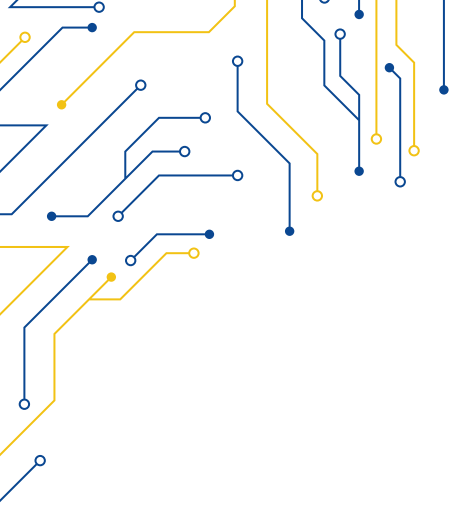

**BASIC-118-SK**

