

# COMPACT 917



## System

- CPU	Intel® 7th & 6th Gen. Core™ i processor i7-6700TE/i5-6500TE/i3/Pentium® 4400TE
- Chipset	Intel® Q170
- Memory type	Dual Channel DDR4 2133MHz SDRAM MAX 32GB
- Ethernet	GbE LAN1: Intel® i219LM; LAN2: Intel® i211AT

## I/O

- Serial ports	1 x RS232, 1 x RS232/422/485
- USB ports	4 USB 3.0 + 2 USB 2.0 (optional)
- Audio	3 (Mic-in, Line-out, Line-in)
- Video input	1 VGA - 1 HDMI - 1 DP
- Ethernet	2 x RJ45
- Power connection	1 x 4 pin DC terminal block 1 x 2 pin remote power switch 2 x LED light for power and HDD indication

## Storage Space

- HDD	2 x 2,5" SATA3 (Support RAID 0,1) easily accessible design
- Mini-PCle	1 x mSATA slot (full-size)
- M2	B key for SSD and 3G supported (type: 2242 ,2280mm)

## Expansion Slot

-Mini-PCle	1, F/S Mini-PCle slot (with mSATA supported)
-PCle	2 PCle 8X or 3 PCI (optional)

## Environment

Operating temperature	0 ~ 50 °C
Rate humidity	5 to 95% @40 °C - non condensing
Certification	CE

## Display

- Display type	17" TFT-LCD
- Max. resolution	1280 x 1024
- Max. color	16,7 M
- Luminance (cd/m2)	350
- View angle (H°/V°)	80 / 80 (H) 60 / 80 (V)
- Contrast	800 : 1

## Touch Screen



- Type	resistive
- Interface	USB
- Light transmission	resistive: 80%

## Mechanical


- Construction	Aluminum front bezel optional INOX 316
- IP Rating	Front bezel IP66
- Mounting	Panel mounting
- Dimension (mm)	452 x 356 x 115
- Net weight	7.9 Kg

## Supported Operating System




- Windows 7 Professional (32/64bit)
- Windows 7 Ultimate (32/64bit)
- Windows 7 Embedded (32/64bit)
- Windows 10 IoT Enterprise (32/64bit)
- Linux

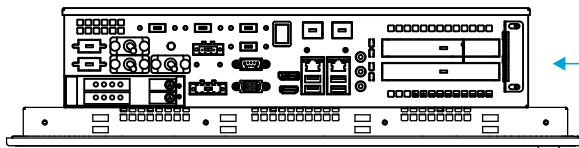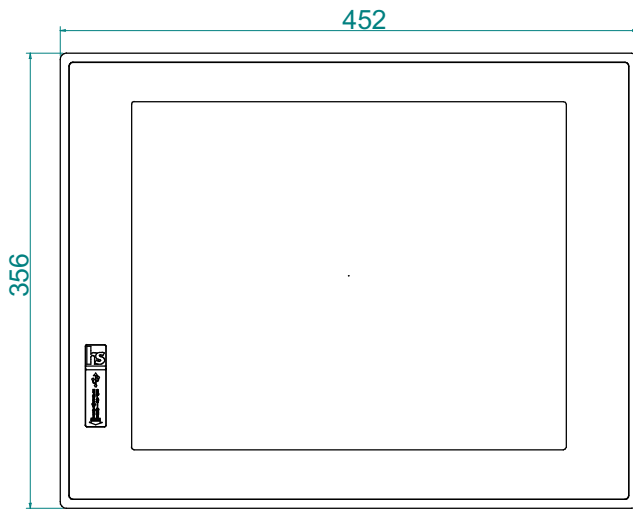

## Legenda

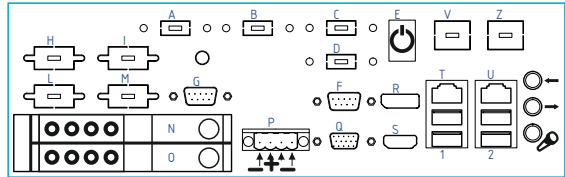

- |                  |                    |
|------------------|--------------------|
| A/B/C/D: USB 2.0 | P: DC INPUT 12-24V |
| E: POWER BUTTON  | Q: VGA             |
| F: COM 1         | R: DP1++           |
| G: COM 2         | S: HDMI            |
| H: COM 3         | T: ETH 1           |
| I: COM 4         | U: ETH 2           |
| L: COM 5         | V: ETH 3           |
| M: COM 6         | Z: ETH 4           |
| N: HD 1          | 1: USB 3.0 1-2     |
| O: HD 2          | 2: USB 3.0 3-4     |

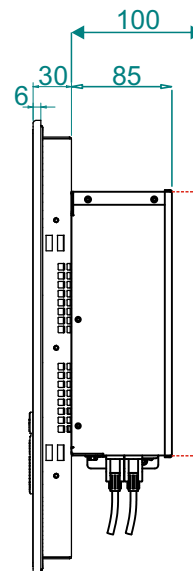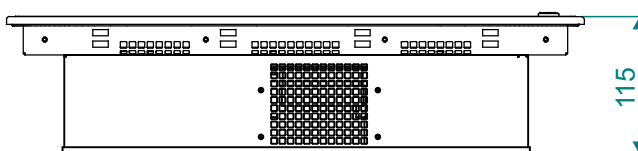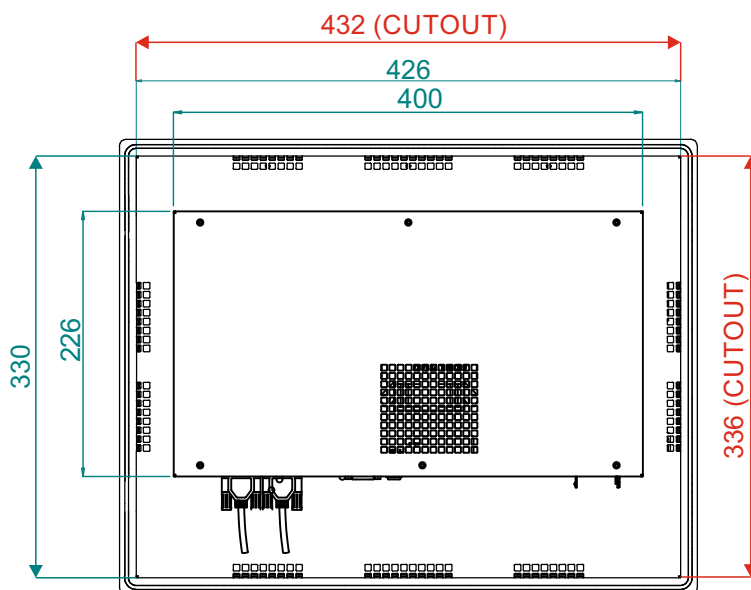

only version  
with 3 slots PCI

unit: mm

