


## ALUMINIUM PANEL PC




Fanless Design



IP65 Front Panel




DC 12V/19V/24V/36V



Projected Capacitive 10 point

MODEL	LIGHT-810J	
<b>SYSTEM</b>		
CPU	Intel® Celeron N5100 up to 2.80GHz	
SYSTEM CHIPSET	Intel® UHD	
MEMORY (MAX)	4GB / 8GB / 16GB	
STORAGE	64GB / 128GB / 256GB / 512GB	
OPERATING SYSTEM	Windows® 10	
<b>I/O INTERFACE</b>		
USB	2x USB 3.0, 2x USB 2.0	
SERIAL	2x RS-232 DB-9 (Optional 1x RS-232 + 1x RS232/422/485)	
LAN	2x RJ45 10/100/1000M	
AUDIO	1x Output, 1x Input	
VIDEO	1x HDMI	
OTHERS	1x SIM	
<b>EXPANSION</b>		
SLOTS	Optional 1x SATA, 1x TPM	
<b>DISPLAY</b>		
TYPE	10.1" TFT-LCD 10:16	
RESOLUTION	800 x 1280	1200 x 1920
BRIGHTNESS	450 cd/m <sup>2</sup>	400 cd/m <sup>2</sup>
<b>TOUCHSCREEN</b>		
TOUCH SYSTEM	10 points Projected Capacitive	
<b>POWER SUPPLY</b>		
POWER INPUT	DC 12V/4A	
<b>MECHANICAL</b>		
CONSTRUCTION	Aluminium Front Bezel, Aluminium Chassis	
MOUNTING	Panel Mount or VESA 100x100	
DIMENSIONS (mm)	257.2 x 170 x 45.95	
NET WEIGHT (kg)	1.2	
IP RATING	IP65 Front Panel	
<b>ENVIRONMENT</b>		
OPERATING TEMPERATURE	-20°C-60°C	
STORAGE TEMPERATURE	-30°C to 70°C	
STORAGE HUMIDITY	95% @40°C Non-Condensing	
<b>INQUIRY CODES</b>		
LIGHT-810J	10.1" TFT, 800x1280, Celeron N5100, PCT, DC12V/4A, 450cd/m <sup>2</sup>	
LIGHT-810FJ	10.1" TFT, 1200x1920, Celeron N5100, PCT, DC12V/4A, 400cd/m <sup>2</sup>	
<b>NOTE</b>	RAM and storage capacity must be specified in the inquiry	

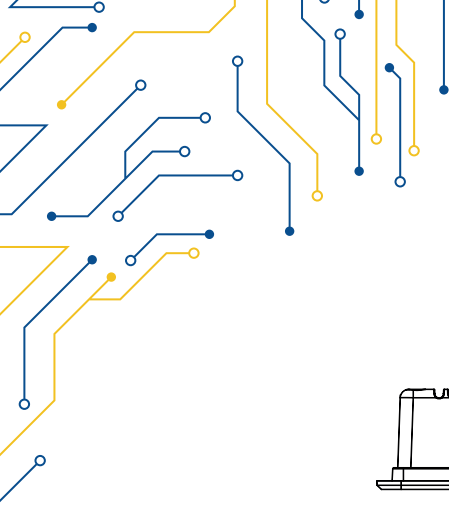

**LIGHT-810J**

