




ALUMINIUM DISPLAY



Wide range power input



Easy Rear access to OSD




Die-casted aluminium rear



Zero bezel frontal panel

MODEL	VLT-108A
I/O	
VGA	1
DVI-D / HDMI	1x Shared Port
DP	1
USB	1x USB type B for touch control
AUDIO	1x (Line-in), 1x Optional Speaker
OSD	OSD on the rear side, on board controller, extendable keypad from connector
POWER	1x power 3-pin terminal block
DISPLAY	
DISPLAY TYPE	8" TFT-LCD 4:3
MAX RESOLUTION	800 x 600
MAX COLOR	16.2M
BRIGHTNESS (cd/m ²)	350
VIEW ANGLE (H°/V°)	140/125
BACKLIGHT LIFETIME (hrs)	40000
CONTRAST	500:1
TOUCHSCREEN	
TYPE	Resistive Zero Bezel (R) Projected Capacitive (P) Glass (G)
INTERFACE	USB
LIGHT TRANSMISSION	Resistive: 80 Capacitive: 90
POWER	
POWER INPUT	9 ~ 36V DC
POWER CONSUMPTION	5.6W MAX.
MECHANICAL	
CONSTRUCTION	Aluminium die-casting chassis
IP RATING	IP66 Compliant Front Bezel
MOUNTING	Panel/VESA Mounting (VESA 75 x 75)
DIMENSIONS (mm)	231 x 176 x 50
NET WEIGHT (kg)	1.8
ENVIRONMENT	
OPERATING TEMPERATURE	0 ~ 50° C
STORAGE TEMPERATURE	-20 ~ 70° C
STORAGE HUMIDITY	10 ~ 90 % non-condensing
ORDERING	
VLT-108AP	8" TFT LCD Industrial Display Projected Capacitive Touch, 350cd/m ²
VLT-108AR	8" TFT LCD Industrial Display Resistive Touch Window, 350cd/m ²
VLT-108AG	8" TFT LCD Industrial Glass Display, 350cd/m ²

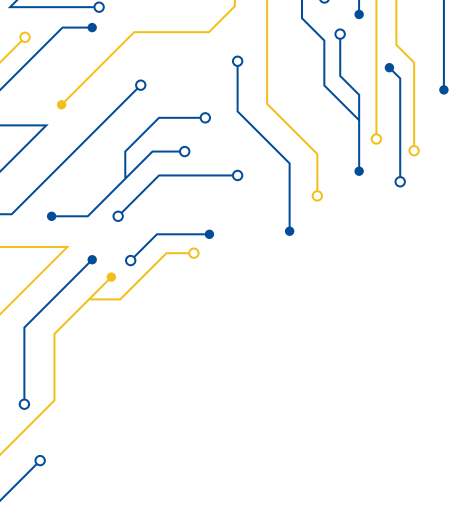

VLT-108A

