



MICROBOX




**N4200
CPU**

Model Name	MICROBOX 230-TE
System	
CPU	Intel®Pentium™ N4200 1.1GHz Processor
Power	6W
Expansion Slot	
Mini-PCIe	1 (Full-Half-size support PCIe x1 & USB) / 1 (Full-size colay with mSATA)
mSATA	1 (Full-size colay with Mini-PCIe)
Memory	
Technology	Dual Channel DDR3L 1867MHz SDRAM
Max.	8GB for SO-DIMM
Socket	2x SO-DIMM (non-ECC)
Graphics	
Controller	Intel 9 ^o Gen. Graphics 4K (Codec/Decode/Encode)
VGA	Support max resolution up to 1920 x 1200
eDP	Support max resolution up to 4096 x 2160 @ 24Hz
Multi Display	Dual display
Ethernet	
Interface	10/100/1000 Mbps
Controller	2x Intel® i210
I/O	
Interface	1x VGA, 1x eDP, 2x RJ45, 2x USB 3.0, 2x USB 2.0, 3x COM (RS232), 1x COM (RS232/422/485), 1x Speaker header (Line-out), 1x Microphone, 3 pins terminal block connector
Power	
Power Input	9 ~ 36V DC
Power Consumption	6W
Mechanical	
Construction	Black steel chassis
Mounting	Wall mounting
Dimension	225 x 66 x 140 mm
Weight	1.7 Kg
Environment	
Operating Temperature	0°C ~ 50°C
Storage Temperature	-40°C ~ 85°C

MICROBOX 230-TE | BOX PC FANLESS

MICROBOX 230-TE

Box PC Fanless

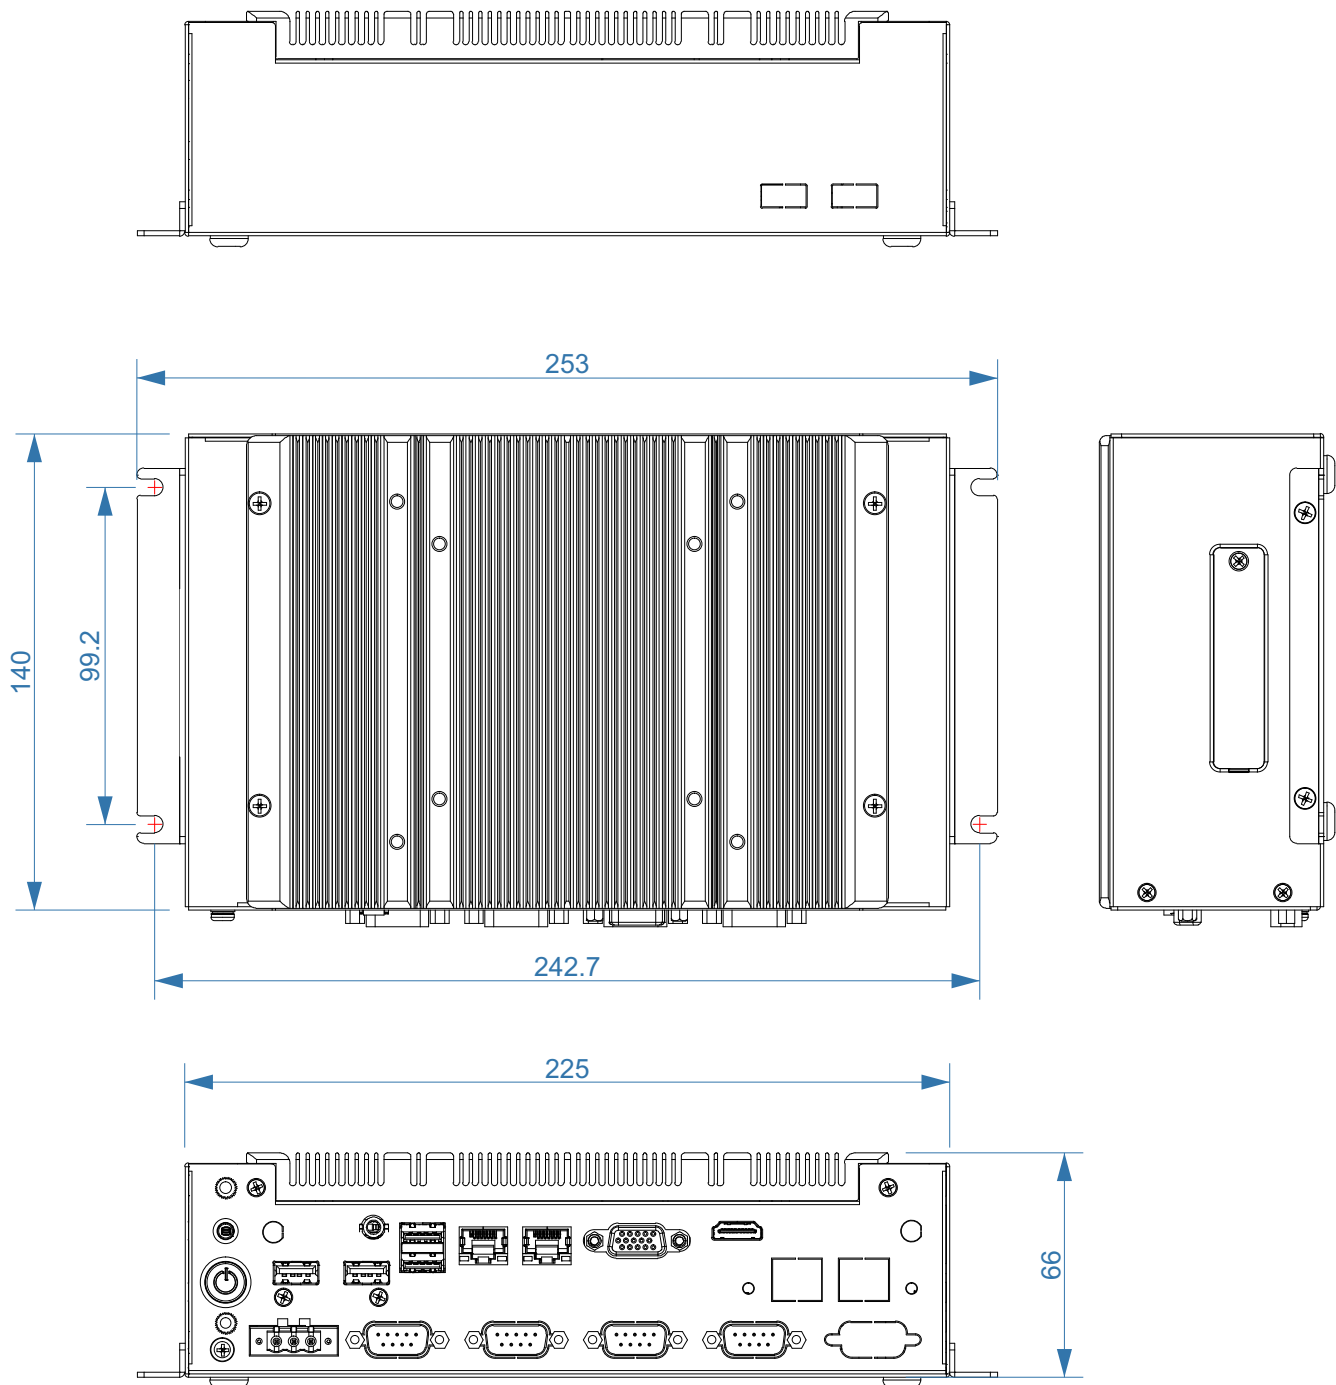

MICROBOX 230-TE | BOX PC FANLESS